


DS-2CE16D1T-IT5

HD1080P Turbo HD EXIR Bullet Camera




EXIR

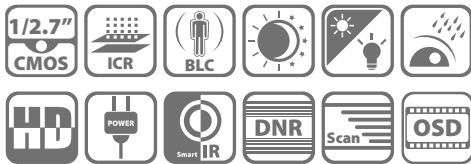

Key features

- HD1080P Video Output
- Adopt HDTV Technology
- True Day/Night, Smart IR
- EXIR technology, 80m IR distance
- IP66 weatherproof
- OSD menu controlled via UTC

Dimensions

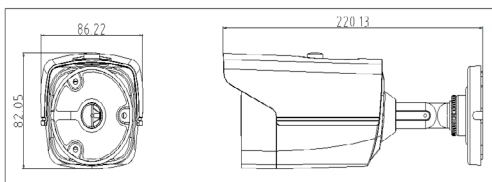

Available models

DS-2CE16D1T-IT5

DS-2CE16D1T-IT5	
Camera	
Image Sensor	1 / 2.7" Progressive Scan CMOS
Signal System	PAL / NTSC
Effective Pixels	1930(H)*1088(V)
Min. Illumination	0.1 Lux @(F1.2,AGC ON), 0 Lux with IR
Shutter speed	1/25(1/30) s to 1/50,000 s
Lens	3.6mm (6mm, 8mm, 12mm, 16mm optional) Angle of View: 90°(3.6mm), 55.4°(6mm), 41.6°(8mm), 26.6°(12mm), 20.6°(16mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	1080p@25fps/1080p@30fps
HD Video Output	1 Analog HD output
S / N Ratio	More than 52dB
Menu	
Camera ID	On/off (0-255)
AGC	Support
D/N Mode	Color/ BW/ Auto/ EXT
White Balance	Auto/ User/ Push/ 8000K/ 6000K/ 4200K/ 3000K
Privacy Mask	On/Off, maximum 2 zones
Motion Detection	On/Off, maximum 4 zones
BLC	Support
Anti-flicker	On/off
Language	English/ Chinese
Function	Digital noise reduction, Mirror
General	
Working Temperature / Humidity	-40 °C – 60 °C (-40 °F – 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Max. 4.5W
Weather Proof Ratings	IP66
IR Range	Up to 80m
Communication	Up the coax Protocol: HIKVISION-C(Coaxitron)
Dimensions	86.22×82.05×220.13mm(3.39"×3.23"×8.67")
Weight	430 g (0.95 lbs)